

IR Sensor Switch

Model: HB-SEN 10A / HB-SEN 10B




Feature

- Any reflection within the detection range would cause the change ON of switch and OFF when a new motion is detected (HB-SEN 10A).
- Any reflection within the detection range would cause the status OFF of switch and no reflection to cause status ON of switch (HB-SEN 10B).
- Detection range: 1-6cm.
- Load type: HV-Halogen lamps, LED lamps, Electronic ballast.
- Ideal for kitchen, furniture, mirror, etc.
- Four sensor shells can be chosen. Dia. of drilling hole: ϕ 10mm & ϕ 17mm.


Parameter

Part No.	Input Voltage	Current	Output	Remarks
HB-SEN 10A	100-240VAC	5A	500W	Hand wave to turn on/off
HB-SEN 10B	100-240VAC	5A	500W	for cabinet, door open light ON, door close light OFF


Product Size

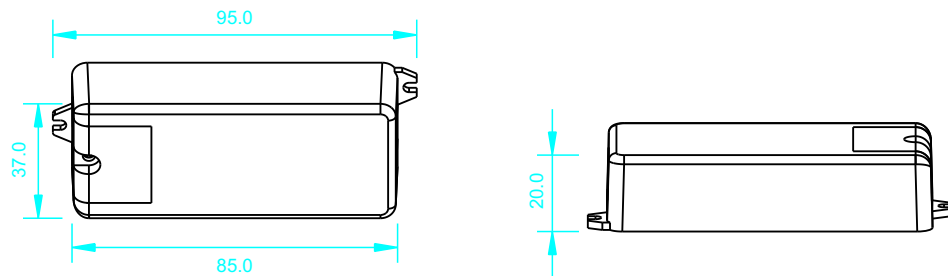

Brief introduction of buttons

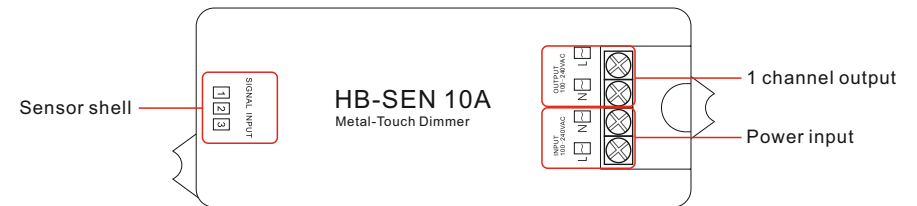

Wiring diagram

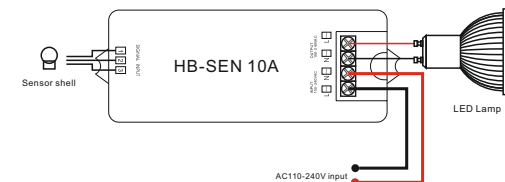

Safety & Warnings

- The product shall be installed and serviced by a qualified person.
- IP20. Please avoid the sun and rain. When installed outdoors, please ensure it is mounted in a water proof enclosure.
- Always be sure to mount this unit in an area with proper ventilation to avoid overheating.
- Please check if the output voltage of any LED power supplies used comply with the working voltage of the product.
- Never connect any cables while power is on and always assure correct connections to avoid short circuits before switching on.
- Please ensure that the cable is secured tightly in the connector
- For update information please consult your supplier.

Warranty Agreement

- We provide lifelong technical assistance with this product:
 - 3-year warranty. We print date on every products, for example : 1125 means year 2011, week 25. The warranty is for free repair or replacement and covers manufacturing faults only.
 - For faults beyond the 3-year warranty we reserve the right to charge for time and parts.
- Limited Warranty
 - Any defects caused by wrong operation.
 - Any damages caused by unauthorized removal, maintenance, modifying, incorrect connection and replacement of chips.
 - Any damages due to transportation, vibration etc. after purchase.
 - Any damages caused by earthquake, fire, lightning, pollution and abnormal voltage.
 - Any damages caused by negligence, inappropriate storing at high temperatures and humidity or near harmful chemicals.
 - Product has been updated
- Repair or replacement as provided under this warranty is the exclusive remedy to the customer.